

DH-HCVR5104/5108/5116H-S2

4/8/16CH 720P-Pro Mini 1U HDCVI DVR



Features

- > Support HDCVI/Analog/IP Video input
- > H.264 dual-stream video compression
- > HCVR5104/5108/5116H-S2: All channel 720P realtime or 1080P non-realtime recording
- > HDMI/VGA simultaneous video output
- > 4/8/16 channel synchronous realtime playback, GRID interface & smart search
- > ONVIF Version 2.4 conformance
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Support 1 SATA HDD up to 4TB, 2 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS)&Smart Phone(DMSS)

DH-HCVR5104/5108/5116H-S2


Technical Specifications

Model	DH-HCVR5104H-S2	DH-HCVR5108H-S2	DH-HCVR5116H-S2
System			
Main Processor	Embedded processor		
Operating System	Embedded LINUX		
Video			
Input	4 channel, BNC	8 channel, BNC	16 channel, BNC
Standard	Analog	NTSC(525Line,60f/s),PAL(625Line,50f/s)	
	HDCVI	1080P/720P HDCVI Camera	
	IP	1080P/720P/D1/CIF IP Camera	
Audio			
Input	1 channel, RCA		
Output	1 channel, RCA		
Two-way Talk	Reuse audio input/output channel 1		
Display			
Interface	1 HDMI, 1 VGA		
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768, 800×600		
Display Split	1/4	1/4/8/9	1/4/8/9/16
Privacy Masking	4 rectangular zones (each camera)		
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
Recording			
Video/Audio Compression	H.264/G.711		
Record Rate	Main Stream:	1080P(1~12/15fps)/ 720P/960H/D1 (1~25/30fps)	
	Extra Stream	CIF/QCIF(1~25/30fps), D1(1~6/7fps)	
Bit Rate	96~4096Kb/s		
Record Mode	Manual, Schedule(Regular(Continuous), MD), Stop		
Record Interval	1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
Video Detection & Alarm			
Trigger Events	Recording, PTZ, Tour, Alarm out, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips		
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
Playback & Backup			
Sync Playback	1/4	1/4/9	1/4/9/16
Search Mode	Time/Date, MD & Exact search (accurate to second)		
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom		
Backup Mode	USB Device/Internal SATA burner/Network		
Network			
Ethernet	RJ-45 port (10/100M)		RJ-45 port

DH-HCVR5104/5108/5116H-S2

	(10/100M/1000M)	
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P	
Max. User Access	128 users	
Smart Phone	iPhone, iPad, Android, Windows Phone	
Storage		
Internal HDD	1 SATA port, up to 4TB	
Auxiliary Interface		
USB Interface	2 ports(1 Rear), USB2.0	
RS485	1 port, For PTZ Control	
General		
Power Supply	DC12V/2A	DC12V/3A
Power Consumption	10W(without HDD)	
Working Environment	-10°C ~ +55°C / 10%~90%RH / 86~106kpa	
Dimension(W×D×H)	Mini 1U, 325mm×255mm×55mm	
Weight	1.5KG(without HDD)	

System Connection

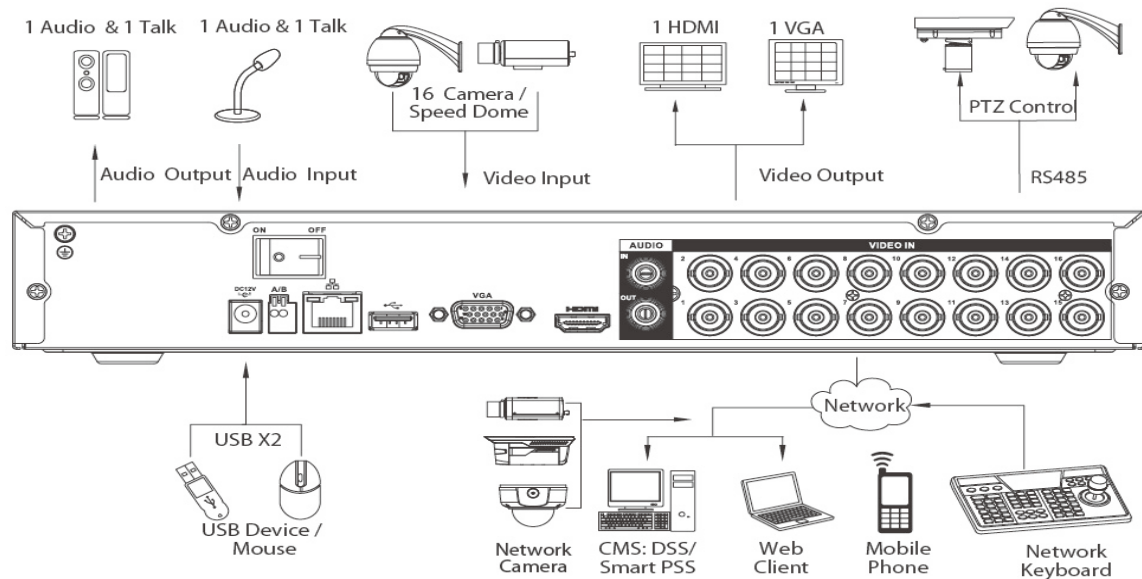

*Takes HCVR5116H-S2 as an example

Dahua Technology Co., Ltd.

1199' BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2015 Dahua Technology Co., Ltd.